




**B4W Light - B6W Medium - B8W Heavy Duty**

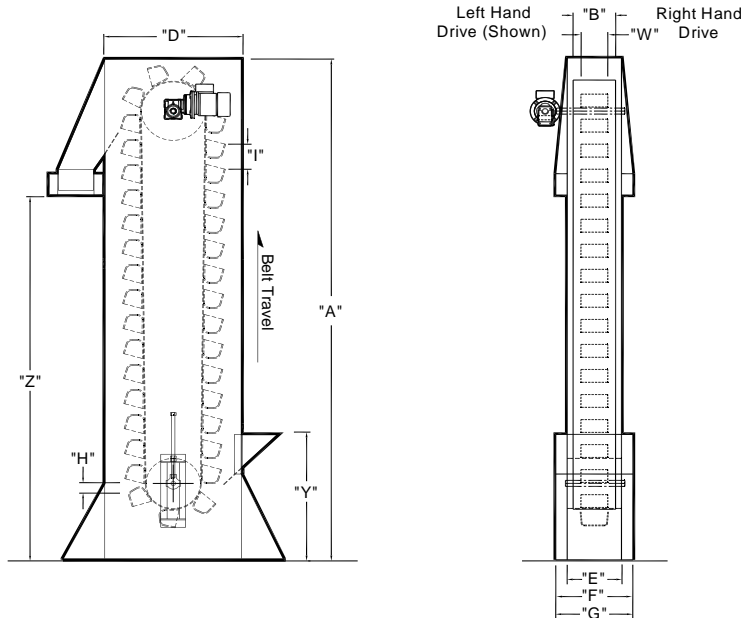

**POWER-PACK® Standard Conveyors - built the way you want them...**

Field Info Required	Data	Field Info Required	Data
A. Conveyor Height O.A.		Conveyor Volume ( tons per Hour )	
B. Belt Width		Belt Speed In Fpm	
D. Body Depth		Power: Volts, Phase, Hz	
W. Bucket Width		I. Bucket Centers	
Y. Load Height ( Top of Hopper )		Z. Discharge Height ( Chute Exit )	
Product Being Carried :			
Adverse Condition If Any :			
<b>Power-Pack will size for application</b>			

Dimensions	Belt Width +	Medium
E. Body Width O . A .	Belt +	2"
F. Tail End Width O . A .	Belt +	6"
G. Drive End Width O . A .	Belt +	15"
H. Belt Tension Take-Up Adjustment		5"
Drive Pulley : <b>Crowned &amp; Lagged</b>		6.625"
Tail Pulley : <b>Crowned Self Cleaning</b>		6.625"

Standard Features			
Body Construction : <b>Mild Steel</b>		Belt Type : <b>PVC</b>	
Motor-Reducer Style : <b>TEFC-Shaft Mounted</b>		Return Idlers: <b>Greased Packed Bearings</b>	
Motor Location : <b>Left Side</b>		Leg Support: <b>Tri-Lock H style</b>	
Bearings : <b>Greased Sealed, Self Aligning</b>		Buckets: <b>PVC 1 1/2" High</b>	
<b>See options section for additional features</b>			

**Power-Pack® Conveyor Company**  
38363 Airport Parkway • Willoughby, OH 44094  
Phone: (440) 975-9955 • Fax: (440) 975-0505  
Website: [www.power-packconveyor.com](http://www.power-packconveyor.com)  
Email: [ppcc@power-packconveyor.com](mailto:ppcc@power-packconveyor.com)



**Safety Features:** Patented Concealed Bearings,  
Patented Concealed Drive & Tail Rolls,  
Patented Boltless, Bearing Slide Mounts