


Drag Chain Dual Strand Horizontal Conveyors

LH4W Light - LH6W Medium - LH8W Heavy Duty

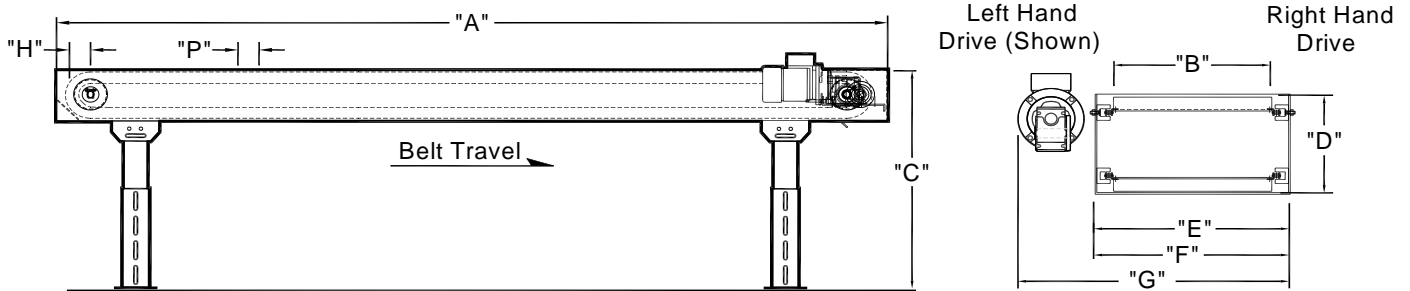

POWER-PACK® Standard Conveyors - built the way you want them...

Field Info Required	Data	Field Info Required	Data
A. Conveyor Length O.A.		Total Load On Conveyor	
C. Height T. O. B. (Top of Belt)		Belt Speed In Fpm	
		Power: Volts, Phase, Hz	
Product Being Carried:			
Adverse Condition If Any:			
Power-Pack will size for application			

Dimensions		Belt Width +	Light	Medium	Heavy
D.	Body Height		7.875"	9.875"	11.875"
E.	Body Width O. A.	Belt +	2.875"	2.875"	2.875"
F.	Tail End Width O. A.	Belt +	7.125"	7.125"	7.125"
G.	Drive End Width O. A.	Belt +	16.125"	16.125"	16.125"
H.	Belt Tension Take-Up Adjustment		2.5"	5"	11"
P.	Drag Chain Pitch:		40/50 Pitch	60 Pitch	80 Pitch
	Drive & Tail Sprockets Dia.		4"	6"	8"

Standard Features			
Body Construction: Mild Steel		Bed Type: Rail	
Belt Type: Conveyor Chain		Return Idlers: Greased Packed Bearings	
Motor-Reducer Style: TEFC-Shaft Mounted		Leg Support: Tri-Lock H style	
Motor Location: Left Side		Cleats: Bar on 12" Centers	
Bearings: Greased Sealed, Self Aligning			
See options section for additional features			

Power-Pack® Conveyor Company
 38363 Airport Parkway • Willoughby, OH 44094
 Phone: (440) 975-9955 • Fax: (440) 975-0505
 Website: www.power-packconveyor.com
 Email: ppcc@power-packconveyor.com



Safety Features: Patented Concealed Bearings,
 Patented Concealed Drive & Tail Rolls,
 Patented Boltless, Bearing Slide Mounts