


XFS8W Heavy Duty

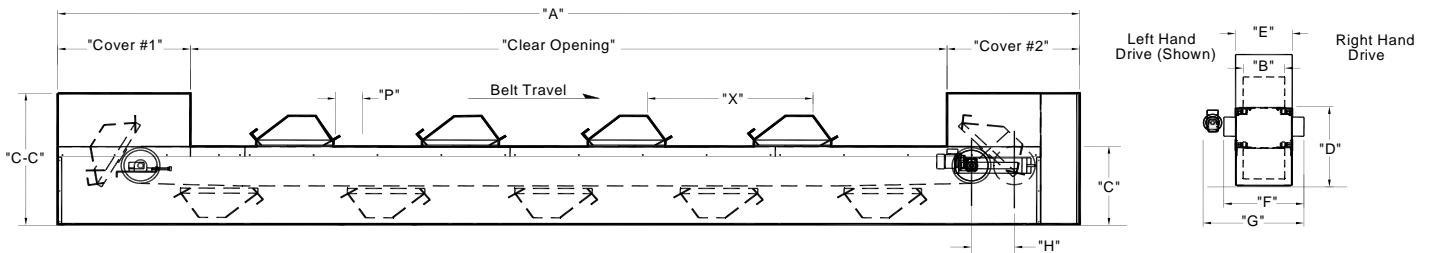

POWER-PACK® Standard Conveyors - built the way you want them...

Field Info Required	Data	Field Info Required	Data
A. Conveyor Length O.A.		Total Load On Conveyor	
B. Slat Width		Belt Speed In Fpm	
C. Height T.O.B. (Top of Belt)		Power: Volts, Phase, Hz	
C-C. Cover Height: (Top of Cover)		X. Fixture Spacing	
Product Being Carried:			
Adverse Condition If Any:			
Power-Pack will size for application			

Dimensions	Belt Width +	Heavy
D. Body Height		33"
E. Body Width O. A.	Belt +	7.75"
F. Tail End Width O. A.	Belt +	15.75"
G. Drive End Width O. A.	Belt +	21.187"
H. Belt Tension Take-Up Adjustment		11"
Drive & Tail Sprocket Dia:		12"
P. Chain Pitch :		6"

Standard Features			
Body Construction : Mild Steel		Bed Type : Conveyor Chain	
Belt Type : Steel Slat		Return Idlers: Greased Packed Bearings	
Motor-Reducer Style :TEFC-Shaft Mounted		Leg Support: Tri-Lock H style	
Motor Location : Left Side			
Bearings : Greased Sealed, Self Aligning			
See options section for additional features			

Power-Pack® Conveyor Company
 38363 Airport Parkway • Willoughby, OH 44094
 Phone: (440) 975-9955 • Fax: (440) 975-0505
 Website: www.power-packconveyor.com
 Email: ppcc@power-packconveyor.com



Safety Features: Patented Concealed Bearings,
 Patented Concealed Drive & Tail Rolls,
 Patented Boltless, Bearing Slide Mounts