


NE4W Light - NE6W Medium - NE8W Heavy Duty

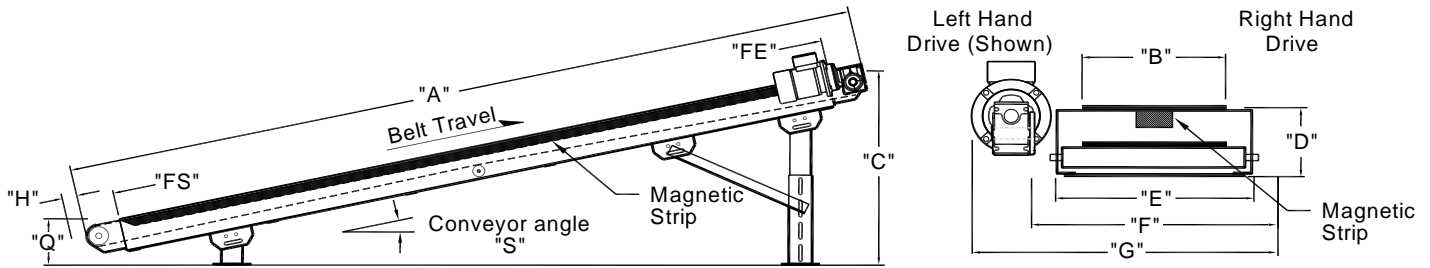

POWER-PACK® Standard Conveyors - built the way you want them...

Configurations	Data	Configurations	Data
ND - Die		NJ - Incline Nose-Over	
NH - Horizontal		NV - Vertical	
NE - Incline		NSN - (Metal) Non/Ferrous Separation	
NKE - Cleated Incline		NSP - (Part) Chip Separation	

Field Info Required	Data	Field Info Required	Data
A. Conveyor Length O.A.		Total Load On Conveyor	
B. Belt Width		Belt Speed In Fpm	
C. Height T.O.B. (Top of Belt)		Power: Volts, Phase, Hz	
Q. Load Height (Top of Belt)		S. Incline Angle	
FS. Magnetized Field Start		FE. Magnetized Field End	

Product Being Carried:

Adverse Condition If Any:

Power-Pack will size for application

Dimensions	Belt Width +	Light	Medium	Heavy
D. Body Height		6.125"	8.125"	10.25"
E. Body Width O. A.	Belt +	4.25"	4.25"	4.375"
F. Tail End Width O. A.	Belt +	4.5"	6.25"	9.25"
G. Drive End Width O. A.	Belt +	13.5"	15.25"	18.25"
H. Belt Tension Take-Up Adjustment		2.5"	5"	11"
Drive & Tail Pulley: Crowned		4.5"	6.625"	8.625"

Standard Features

Body Construction: Stainless Steel	Bed Type: Slider
Belt Type: PVC	Belt Lacers: S.S. Clipper Lacer
Motor-Reducer Style: TEFC-Shaft Mounted	Return Idlers: Greased Packed Bearings
Motor Location: Left Side	Leg Support: Tri-Lock H style
Bearings: Greased Sealed, Self Aligning	

See options section for additional features

Power-Pack® Conveyor Company
 38363 Airport Parkway • Willoughby, OH 44094
 Phone: (440) 975-9955 • Fax: (440) 975-0505
 Website: www.power-packconveyor.com
 Email: ppcc@power-packconveyor.com



Safety Features: Patented Concealed Bearings,
 Patented Concealed Drive & Tail Rolls,
 Patented Boltless, Bearing Slide Mounts