


VKE4W Light - VKE6W Medium - VKE8W Heavy Duty

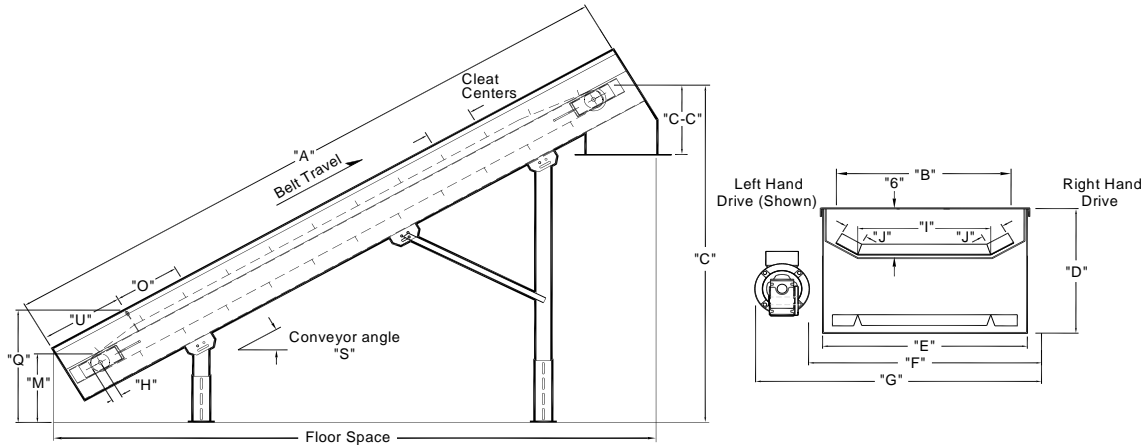

POWER-PACK® Standard Conveyors - built the way you want them...

Field Info Required	Data	Field Info Required	Data
A. Conveyor Length O.A.		Total Load On Conveyor	
B. Belt Width		Belt Speed In Fpm	
C. Height T.O.B.(Top of Belt)		Power: Volts, Phase, Hz	
C-C. Length of Chute	S.	Conveyor Angle	
M. Top of Belt @ Bottom			
Product Being Carried:			
Adverse Condition If Any:			

Power-Pack will size for application

Dimensions		Belt Width +	Light	Medium	Heavy
D.	Body Height		14.25"	16.25"	18.25"
E.	Body Width O. A.	Belt +	0.75"	0.75"	0.75"
F.	Tail End Width O. A.	Belt +	5"	7"	7.75"
G.	Drive End Width O. A.	Belt +	14"	16"	16.75"
H.	Belt Tension Take-Up Adjustment		2.5"	5"	11"
	Drive & Tail Pulley: Crowned		4.5"	6.625"	8.625"
Q.	Load Height (Start of Opening)	M. +	5"	5"	5"
I.	Belt Flat (Pocket)	Belt -	8"	8"	8"
J.	Flange Sides		4"	4"	4"
U.	Distance to Inlet Opening		20"	24"	30"

Standard Features

Body Construction : Mild Steel	Bed Type : Slider
Belt Type : PVC	Belt Lacers: Clipper Lacer
Motor-Reducer Style : TEFC-Shaft Mounted	Return Idlers: Greased Packed Bearings
Motor Location : Left Side	Leg Support: Tri-Lock H style
Bearings : Greased Sealed, Self Aligning	Cleats: PVC 1 1/2" High on 12" Centers

See options section for additional features

Power-Pack® Conveyor Company
 38363 Airport Parkway • Willoughby, OH 44094
 Phone: (440) 975-9955 • Fax: (440) 975-0505
 Website: www.power-packconveyor.com
 Email: ppcc@power-packconveyor.com



Safety Features: Patented Concealed Bearings,
 Patented Concealed Drive & Tail Rolls,
 Patented Boltless, Bearing Slide Mounts