


BDLR4W Light - BDLR6W Medium - BDLR8W Heavy Duty

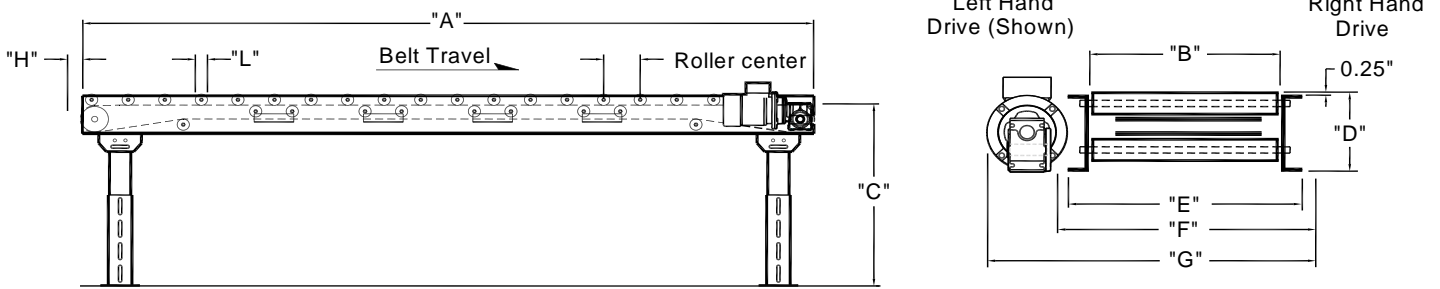

POWER-PACK® Standard Conveyors - built the way you want them...

Field Info Required	Data	Field Info Required	Data
A. Conveyor Length O.A.		Total Load On Conveyor	
B. Between Frame (B.F.)		Belt Speed In Fpm	
C. Height T.O.R. (Top of Roller)		Power: Volts, Phase, Hz	
Roller Dia & Ga.		Roller Centers	
Product Being Carried:			
Adverse Condition If Any:			
Power-Pack will size for application			

Dimensions	Between Frame +	Light	Medium	Heavy
D. Body Height		6.875"	8.875"	10.875"
E. Body Width O. A.	B.F. +	3.25"	3.25"	4"
F. Tail End Width O. A.	B.F. +	3.25"	3.25"	4"
G. Drive End Width O. A.	B.F. +	12.25"	12.25"	13"
H. Belt Tension Take-Up Adjustment		2.5"	5"	11"
L. Bed Roller Dia.		1.9"	2.5"	3.5"
Bed Roller Ga.		9 ga	11 ga	0.300"
Hex Shaft Dia.		7/16"	11/16"	1-1/16"
Drive & Tail Pulley : Crowned		4.5"	6.625"	8.625"

Standard Features			
Body Construction : Mild Steel		Bed Type : Roller	
Belt Type : PVC		Belt Lacers: Clipper Lacer	
Motor-Reducer Style : TEFC-Shaft Mounted		Return Idlers: Greased Packed Bearings	
Motor Location : Left Side		Leg Support: Tri-Lock H style	
Bearings : Greased Sealed, Self Aligning			
See options section for additional features			

Power-Pack® Conveyor Company
 38363 Airport Parkway • Willoughby, OH 44094
 Phone: (440) 975-9955 • Fax: (440) 975-0505
 Website: www.power-packconveyor.com
 Email: ppcc@power-packconveyor.com



Safety Features: Patented Concealed Bearings,
Patented Concealed Drive & Tail Rolls,
Patented Boltless, Bearing Slide Mounts