


**FWH4W Light - FWH6W Medium - FWH8W Heavy Duty**

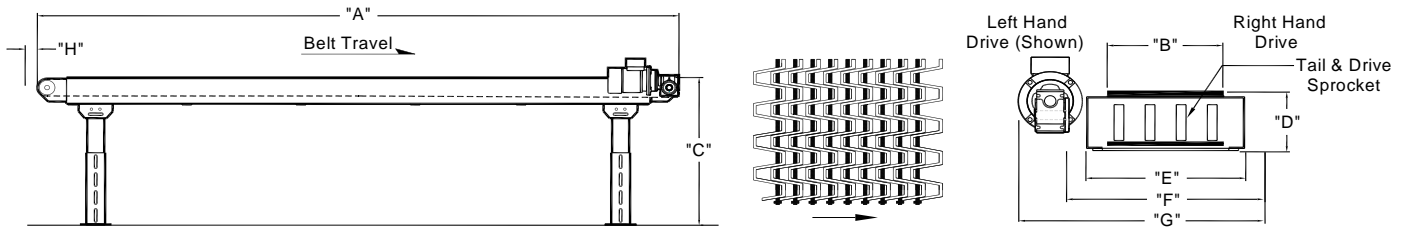

**POWER-PACK® Standard Conveyors - built the way you want them...**

Field Info Required		Data	Field Info Required		Data
A.	Conveyor Length O.A.		Total Load On Conveyor		
B.	Belt Width		Belt Speed In Fpm		
C.	Height T.O.B. ( Top of Belt )		Power: Volts, Phase, Hz		
Bed Style					
Product Being Carried:					
Adverse Condition If Any:					
<b>Power-Pack will size for application</b>					

Dimensions		Belt Width +	Light	Medium	Heavy
D.	Body Height		6.125"	8.125"	10.25"
E.	Body Width O. A.	Belt +	4.25"	4.25"	5.25"
F.	Frame Width O. A.	Belt +	4.5"	6.25"	9.25"
G.	Drive End Width O. A.	Belt +	13.5"	15.25"	18.25"
H.	Belt Tension Take-Up Adjustment		2.5"	5"	11"
Drive & Tail Sprocket Diam.			4"	6"	8"

Standard Features			
Body Construction : <b>Mild Steel</b>		Bed : <b>Slider with Plastic wear strips</b>	
Belt Type : <b>1" x 1", Galvanized Flat Mesh</b>		Belt Lacers : <b>Pin</b>	
Motor-Reducer Style : <b>TEFC-Shaft Mounted</b>		Return Idlers : <b>Greased Packed Bearings</b>	
Motor Location : <b>Left Side</b>		Leg Support : <b>Tri-Lock H style</b>	
Bearings : <b>Greased Sealed, Self Aligning</b>			
<b>See options section for additional features</b>			

**Power-Pack® Conveyor Company**  
38363 Airport Parkway • Willoughby, OH 44094  
Phone: (440) 975-9955 • Fax: (440) 975-0505  
Website: [www.power-packconveyor.com](http://www.power-packconveyor.com)  
Email: [ppcc@power-packconveyor.com](mailto:ppcc@power-packconveyor.com)



**Safety Features:** Patented Concealed Bearings,  
Patented Concealed Drive & Tail Rolls,  
Patented Boltless, Bearing Slide Mounts